

CATEGORY 7 S/FTP 28AWG, 600MHz, LSZH

PGS-FL78-41ST341X1

STANDARD COMPLIANCE

UL LISTED: UL444

ISO/IEC 11801 CATEGORY 7: PATCH CABLE

IEC 61156-5 FOR PATCH CABLE


IEC60332-1-2 FLAME TEST

RoHS COMPLIANCE FOR THE REQUIREMENT OF EUROPEAN UNION ISSUED DIRECTIVE 2011/65/EU

UL VERIFIED TO IEC 62821-1 LSHF(Low-Smoke-Halogen-Free) JACKET



SECTION PLANS

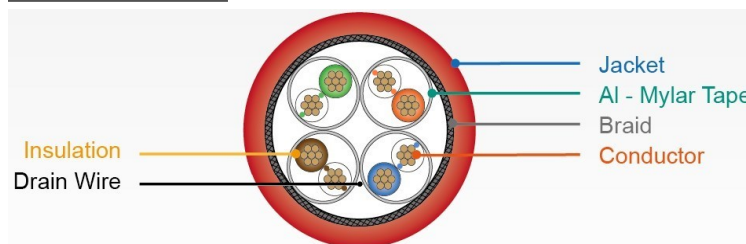

CONSTRUCTION

		CATEGORY 7 S/FTP STRANDED
CONDUCTOR	MATERIAL & SIZE	BARE COPPER, 28AWG
	DIAMETER	7/0.12mm +/-0.003mm
INSULATION	MATERIAL	HDPE(CMI-75E)
	THICKNESS	MIN. AVERAGE THICKNESS: 0.28mm MIN.THICKNESS: 0.22mm
	COLOR CODE	Pair 1: Blue & White/Blue Pair 3: Green & White/Green Pair 2: Orange & White/Orange Pair 4: Brown & White/Brown
	DIAMETER	0.9 +/-0.03mm
	TENSILE STRENGTH	16.5 MPa / 2400 PSI
	ULTIMATE ELONGATION	≥300%
JACKET	MATERIAL	CMX-LSHF Compound
	THICKNESS	MIN. AVERAGE THICKNESS: 0.585mm MIN.THICKNESS: 0.485mm
	OVERALL DIAMETER	5.2mm +/-0.3mm
	MINIMUM BENDING RADIUS	≥ 8 TIMES OF OVERALL DIAMETER
	MAXIMUM PULLING TENSION	MAX. 85N
	TENSILE STRENGTH	8.3 MPa / 1200 PSI
	ULTIMATE ELONGATION	≥100%
SHIELDING	MATERIAL	Aluminum/Mylar Tape ; Tinned Copper Braid
DRAIN WIRE	MATERIAL	Tinned Copper

ELECTRIC REQUIREMENT

	CATEGORY 7 S/FTP STRANDED
CHARACTERISTIC IMPEDENCE(Zo)	85 ~ 115Ω (1 ~ 600MHz)
DC. RESISTANCE CAPACITANCE UNBALANCE	3%
PAIR-TO-GROUND CAPACITANCE UNBALANCE	330 pF/100M MAX.
CONDUCTOR RESISTANCE	22.3Ω/ 100M 20°C MAX.
MUTUAL CAPACITANCE	5600 pF/100M MAX.
SPARK TEST	2.5KV
NOMINAL VELOCITY OF PROPAGATION (N.V.P.)	80%

CATEGORY 7 S/FTP 28AWG, 600MHz, LSZH

PGS-FL78-41ST341X1

ENVIRONMENTAL CONDITION & USAGE

TEMPERATURE RANGE	SHIPPING & STORAGE	-20°C to 75°C
	INSTALLATION	0°C to 50°C
	OPERATION	-10°C to 60°C

TRANSMISSION REQUIREMENTS

Frequency MHz	Insertion loss Stranded	Return Loss	NEXT	ACRF	Prop. Delay	PS NEXT	PS ACRF
1	4.5	20.0	74.3	67.8	570	72.3	64.8
10	10.8	25.0	59.3	47.8	545	57.3	44.8
20	12.4	25.0	54.8	41.8	542	52.8	38.8
31.25	16.5	23.6	51.9	37.9	540	49.9	34.9
62.5	21.8	21.5	47.4	37.9	539	45.4	28.9
100	28.5	20.1	44.3	27.8	538	42.3	24.8
200	41.2	18.0	39.8	21.8	538	37.8	18.8
250	46.5	17.3	38.3	19.8	536	36.3	16.8
300	51.3	16.8	37.1	18.3	536	35.1	15.3
400	60.6	15.9	35.3	15.8	536	33.3	12.8
550	67.9	15.2	33.8	13.8	536	31.8	10.8
600	75.5	14.7	32.6	12.3	536	33.9	9.3

Values show on tables above are for reference purpose only.

MARKING & PACKAGING

PACKAGING	FT/ BOX	FT/ BOX
APPROX. WEIGHT(kg)		
DIMENSION(mm)		
PACKAGES per PALLET		
MARKING	TYPE CMX-LSHF 4PR 28AWG PATCH CABLE 75°C (UL) E495789 P ISO/IEC 11801 Category 7 S/FTP 600MHz LSZH PT pactech FlexLite PGS-FL78-41ST341X1 STRANDED BATCH NO. RoHS	